

PURIFICATION TECHNOLOGY

SUPER (7, 14, 21, 28) COMMERCIAL WALL MOUNTED UNIT




Technical Details

- | | |
|----------------------------|--|
| • Model | Ozone Turbo |
| • Input | 220 V |
| • Ampere | 3.0A |
| • Frequency | 50Hz |
| • Ozone output | 7-14-21-28 grams per hour |
| • Maximum Volume | up to 600m ³
(dependent on bio-load) |
| • Airflow (nominal figure) | 600nm ³ /hr. |
| • Dimensions | 2000mm x 2000mm x 1700mm |
| • Enclosure | Aluminum, powder coated |
| • Weight | 6.5kg |
| • Source | UVC, 185nm, germicidal |



Applications

- Ethylene control in cold storage of fruit
- Hotel rooms
- Sterilizations of ICUs, operating theatres
- Cheese, meat and wine storage areas
- Smoking areas
- General odor control
- Dustbin areas
- Mortuaries

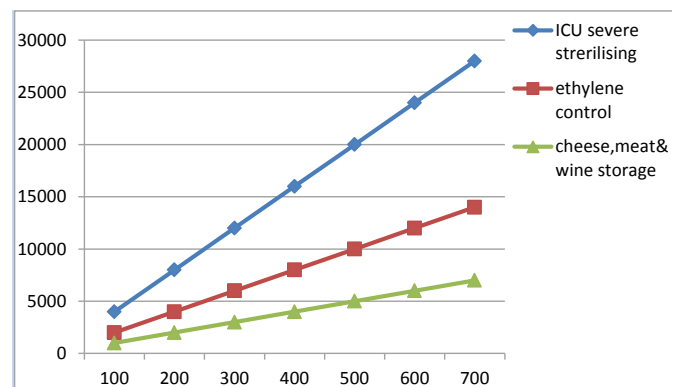

Please note that we reserve the right to alter, amend or change all units without prior notice.

E&OE

PROD CODE 22

